

EW CYC 625/1250W



CONSTRUCTION:

The reflector housing is of a simple construction, made of plastic-coated steel sheet, in black matte color. On the back there are air holes for cooling the lamp. The EW Cyc reflector is also made in the EW Dif 1250W variant (ref. 3071) where a reflective flap is mounted on the underside of the reflector, so that beam limitation and correction in the distribution of light intensity in the spot can be performed simultaneously.

SPECIFICATION:






Lamp	- P2/10, 625W, 230V, 3200K - P2/12, 1250W, 230V, 3200K
Base	R7s
Reflectiv mirror	High shine
Control	M.O. - Manuel operated; P.O. - Pole operated
Power supply	220V, 50Hz; Cable H05 3x2,5mm ² , lenght 1m
Color	Black matte, termoresistant / by customer's request
Weight	4,4 - 5,4kg
Packing	Cardboard box, dim: 450x400x500



ACCESSORIES:

Safty wire rope	8161
Safty grid	3121
Filter holder	3122

REFERENCES:

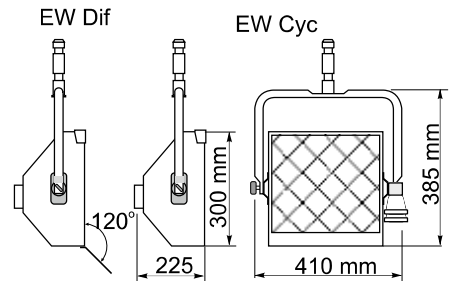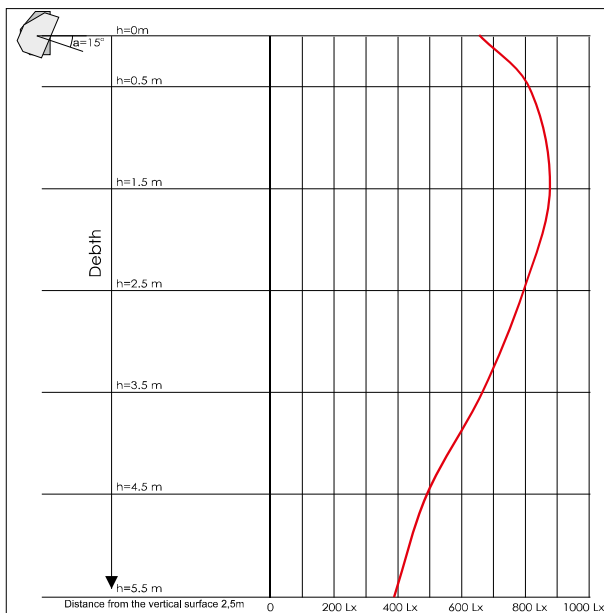

PHOTOMETRIC DATA:

Depth (m)	Light intensity (Lx) at depth 1.5m		
	1m left	Centar	1m right
0	550	670	560
0.5	680	810	680
1.5	720	870	720
2.5	670	780	680
3.5	560	650	570
4.5	470	490	470

* Lamp P2/12 1250W

* Distance L=2,5m

EW CYC 625/1250W (M.O.) (P.O.) (REF. 3021)
EW DIF 625/1250W (M.O.) (P.O.) (REF. 3071)